

e-UNITS

Description

A low cost transponder for embedding into your product.

Options

- 1 or 2 side paper or PVC protective layer
- Coil diameters available 25mm, 30mm, 52mm

Chips supported


- EM4100:125kHz Read only
- Atmel 5557:125kHz Read/write
- EM4550:125kHz Read/write
- Hitag:125kHz Read/write

Mechanical dimensions

- 1.3mm thickness

Features

- 125kHz operating frequency
- Large reading range

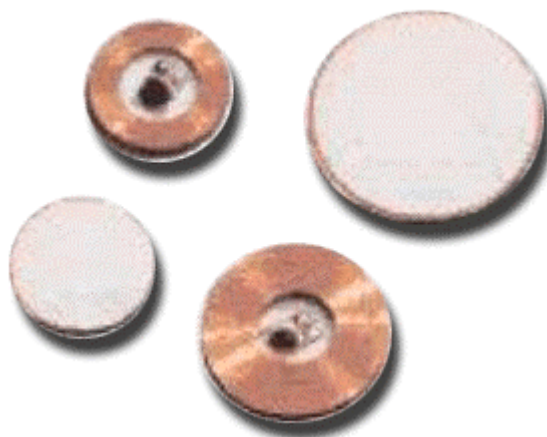

Ordering codes

Type	Order code
EM4100	EU-4100-XX
Atmel 5557	EU-5557-XX
EM4550	Call for details
Hitag	Call for details